ADAPTING ANALYSIS TOOLS TO ENGINE EXTERNALS ANALYSIS

Ken Dunkelberg The Boeing Company Seattle, Washington


ABSTRACT

Market forces are driving industry to reduce product cycle time (the time required to conceive, design, build, test, validate and deliver a product). Application of existing tools in new areas can reduce the time required to design a new product and increase the confidence of acceptable test results later in the expensive testing and validation phase. Finite element methods, computational fluid dynamics codes and sharing of CAD datasets when applied to the design of engine externals can provide methods for product improvement and expedited delivery to the customer.


Engine Externals Provide

- Engine
- FuelLubricationControlCooling
- Airplane
- Pneumatic power
 - Electrical power
- Hydarualic power

- Flight Deck Indication
- Primary thrust setting
- parameter Secondary engine parameters
- Indications of propulsion Warnings to flight crew

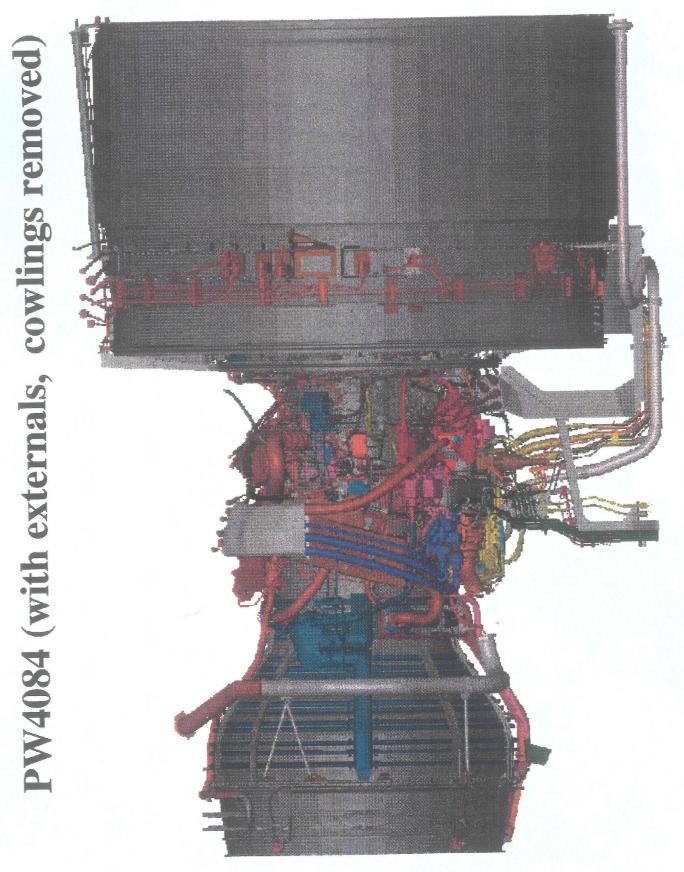

PW4084 (with externals, cowlings removed)

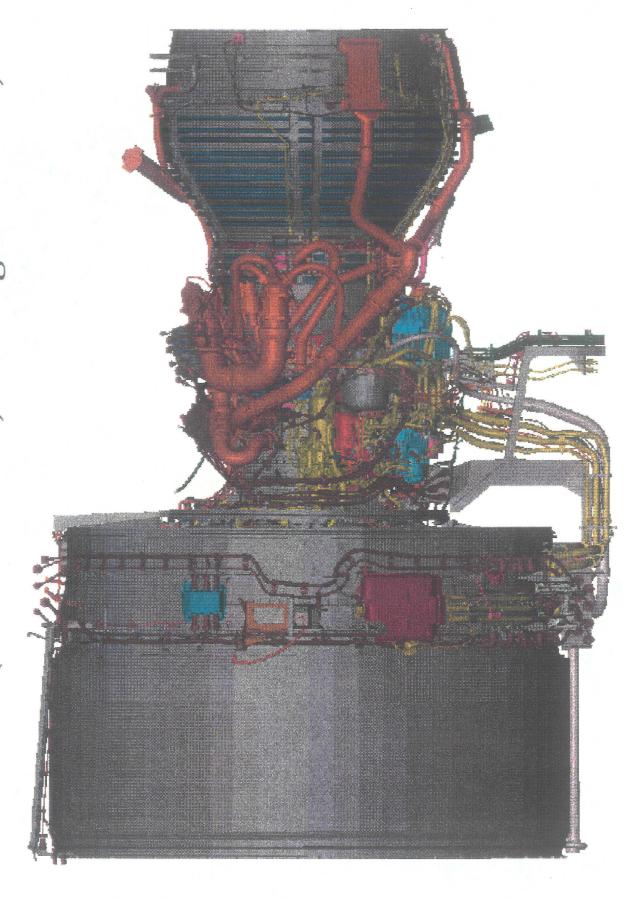

Types of engine externals analysis


- Straight forward problem solutions available for
- Heat exchanger sizing
- Oil cooling system performance
- Fuel system performance
- Pneumatic duct sizing
- Pressure losses in ducting
- Cooling system inlet recovery

- No straight forward problem solution available for
- Prediction of undercowl ambient temperatures
- Prediction of undercowl fire extinguishing agent concentration
- Bulb seal performance

Previous reasons for not pursuing analysis

- Complex geometry unavailable to analysis software
- Lack of user friendly software




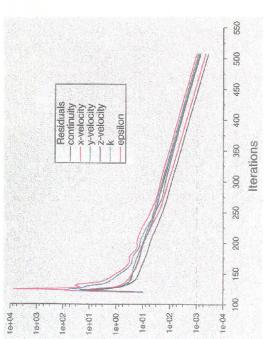

Cost of computing (including speed)


Undercowl ambient temperatures - Requirement

remain within their temperature limits during worst case airplane successful test results show that all component temperatures FAA requires demonstration of cooling system performance, operating conditions.

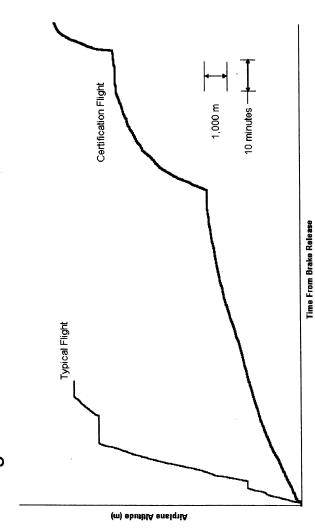

Undercowl ambient temperatures Current Approach


- Simplistic analysis followed by test (and retest)
- Analysis assumptions
- One dimension analysis
- Uniform mixing of flows
- Hardware revisions by test (and retest)
- Schedule disruptions
- Increased cost
 It costs time and
 money, but it can
 be made to work

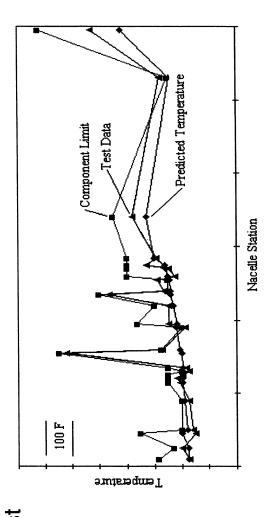

Undercowl ambient temperatures Simplified Geometry

Undercowl ambient temperatures -Preliminary Results 6.08e+00 4.61e+01 3.47e+01 3.63e-01

Undercowl ambient temperatures -Preliminary Results

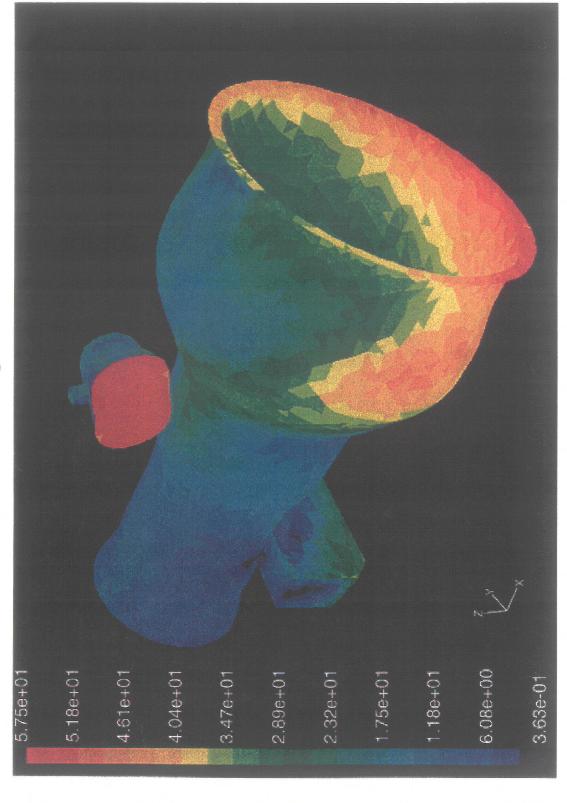


Undercowl ambient temperatures Proposed Approach

- CFD analysis to determine airflow patterns and temperatures
- Status:
- First stage of geometry definition complete
- Major air sources identified and included in model
- Preliminary adiabatic solution complete
- Future efforts
- Refine geometry
- Include engine case heat


Bulb seal performance - Requirement

• FAA requires
demonstration
that no "hazardous
quantity" of fluid pass
between areas of the
nacelle designated
as fire zones.

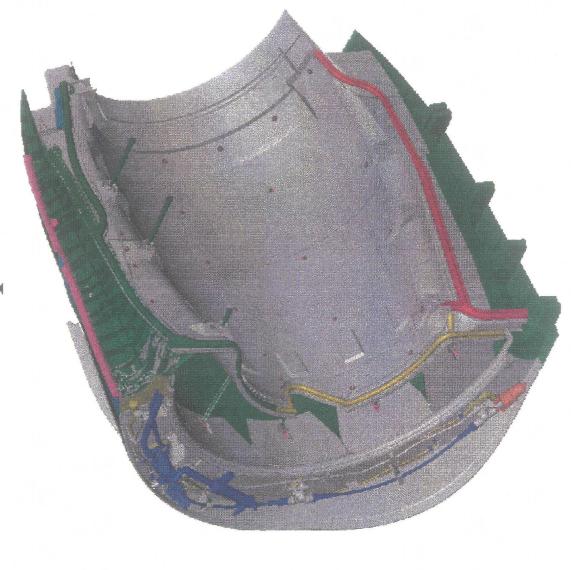


Bulb seal performance - Current Approach

 Boeing uses fireproof, elastomeric bulb seals to provide barriers between fire zones




- Main design concerns
- Required geometry
- Ease of manufacture
 - Design standards for seal compression

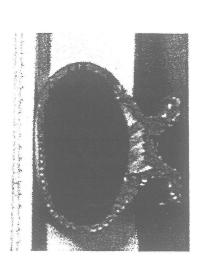

Bulb seal performance - Test Results

Colored fluids are dumped into fire zones to demonstrate separation

Mixed colors
 in the same
 fire zone indicate
 a seal leak and
 failure

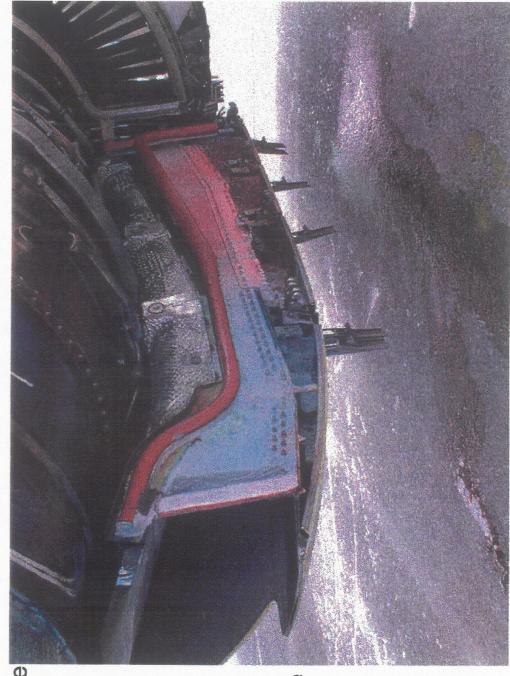

Bulb seal performance - Failure Modes

Incomplete or inadequate seal compression







Seal creased during assembly

Sliding contact (scrubbing) rather

than normal compression

Bulb seal performance - Proposed Approach

Finite element modeling of seal to predict response to failure modes, complex geometry and new manufacturing methods

Conclusion

- Valuable insight to the problems of engine externals can be gained by application of analytical tools in new areas
- Applications should be driven by current design problems that arise in test or inservice.
- Analytical tools should be easily adapted to new classes of problems.
- Process can be implemented now to minimize impact to customer.